


# STANDARD DETAIL DRAWINGS

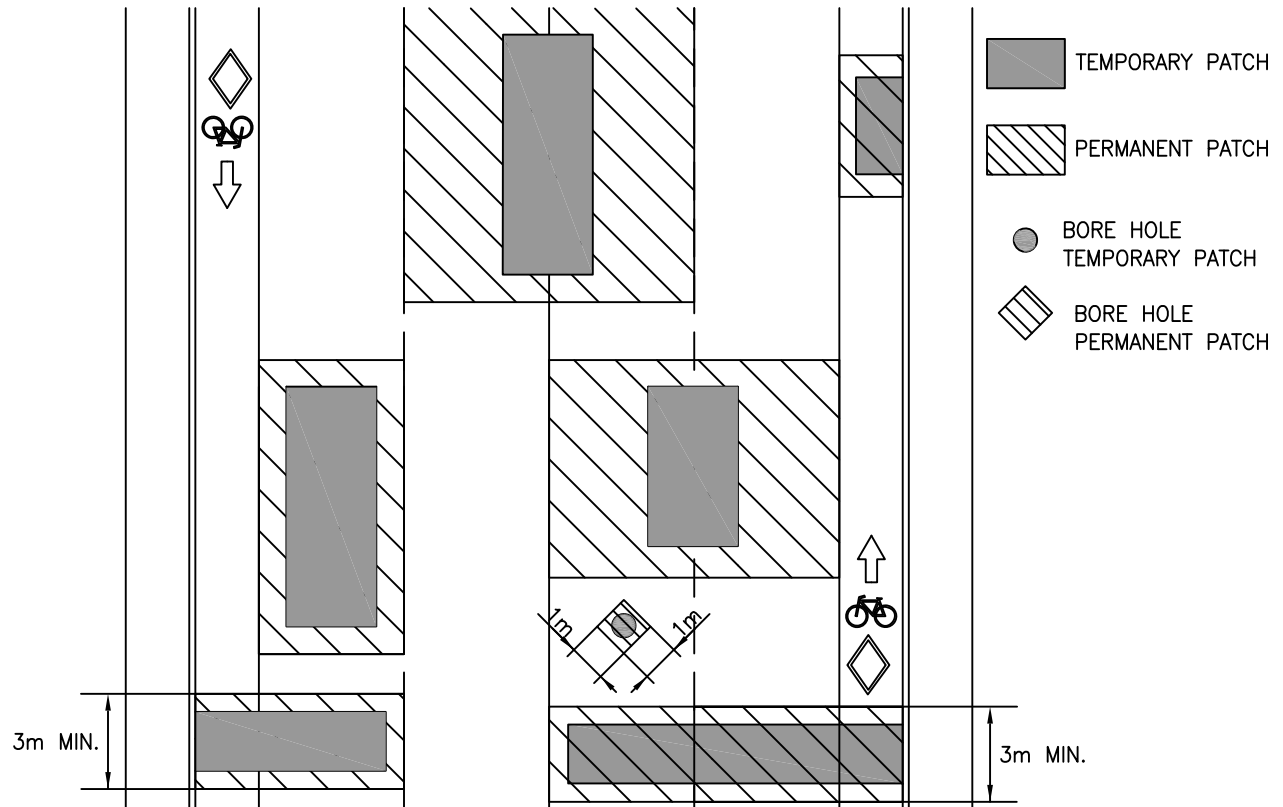

## NOTES

1. PERMANENT PATCH MUST BE PLACED AFTER 3 MONTHS OR AS DIRECTED BY DISTRICT ENGINEER
2. MINIMUM WIDTH OF TRANSVERSE PAVEMENT CUTS IS 3m
3. MINIMUM WIDTH OF LONGITUDINAL PAVEMENT CUTS DETERMINED BY PERMANENT PATCHING REQUIREMENTS
4. ANY TRANSVERSE PAVEMENT CUTS WITHIN 5m OF EACH OTHER SHALL BE INCORPORATED INTO ONE PATCH
5. BORE HOLES FOR GEOTECHNICAL WORKS SHALL BE PERMANENTLY PATCHED WITH HOT MIX AND PLACED IN A DIAMOND SHAPE
6. FOR TRENCH STRUCTURE AND DIMENSIONS, REFER TO MMCD STANDARD DRAWING G5.